



PRODUCT SPECIFICATION


4" CA NF Element Series

Model	Permeate flow GPD (m3/day)*	Average Salt Rejection (%)	Minimum Salt Rejection (%)
4040-O3P3R1	1,900 (7.0)	85.00	80.00

Performance is based on the following test conditions: 2,000.00 ppm NaCl, 225.00 psi, 25°C, 15% recovery, pH 5.50, 30 minutes operation.

OPERATIONAL AND DESIGN DATA

Membrane Type.....	Cellulose Acetate Nanofiltration Membrane
Configuration.....	Spiral Wound, Fiberglass Outer Wrap
Active Membrane Area.....	80 ft ² (7.4 m ²)
Recommended Applied Pressure.....	200 - 500 psi (14 - 34 bar)
Maximum Applied Pressure.....	600 psi (41 bar)
Recommended Operating Temperature.....	50 - 90°F (10 - 32°C)
Feedwater pH Range.....	5.5 nominal, 4 - 7
Chlorine Tolerance.....	0.5 ppm nominal, 1.0 ppm max
Maximum Feed Flow.....	20 GPM (4.5m3/hr)
Minimum Brine Flow/Permeate Flow Ratio....	5:1
Maximum SDI (15 minutes)	5.0
Maximum Turbidity.....	1 NTU
Application.....	Dialysis Make up Water

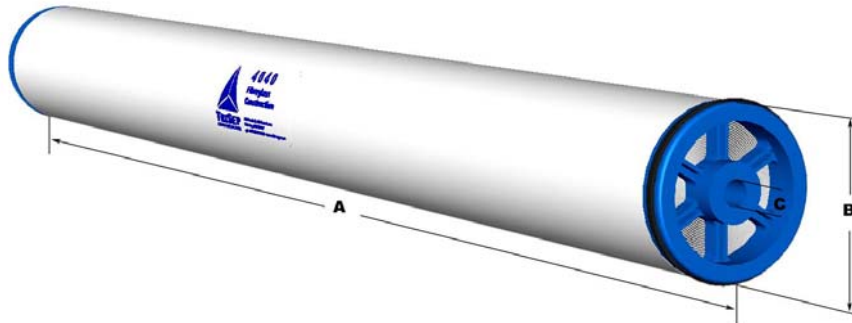

Element Weight : 15 (7)
 Length (A) : 40.00 (1,016) Diameter (B) : 4.00 (101) Permeate Tube (C) : 0.75 (19.1)
 Units in pounds and inches, units in paranthesis in kilograms and millimetres.
 Mechanical Configuration: TriSep Style Core Tube
 Feed Spacer: 0.031" thick diamond spacer

* Permeate flow is clean water flux at standard conditions above. Not applicable for all feedwater conditions. Individual element's permeate flow may vary +/- 15%.



Engineered Membrane
SOLUTIONS