



PRODUCT SPECIFICATION


8" ACM RO High Temperature Turboclean Element

Model	Permeate flow GPD (m3/day)*	Average Salt Rejection (%)	Minimum Salt Rejection (%)
8038-M2D7U8	9,400 (35.0)	99.00	98.00

Performance is based on the following test conditions: 2,000.00 ppm NaCl, 225.00 psi, 25°C, 15% recovery, pH 8.00, 30 minutes operation.

OPERATIONAL AND DESIGN DATA

Membrane Type.....	ACM Fully Aromatic Polyamide Advanced Composite Membrane
Configuration.....	Spiral Wound, High Temperature Turboclean Shell
Active Membrane Area.....	355 ft ² (32.6 m ²)
Recommended Applied Pressure.....	100 - 300 psi (7 - 21 bar)
Maximum Applied Pressure.....	600 psi (41 bar)
Recommended Operating Temperature.....	35 - 140°F (2 - 60°C)
Feedwater pH Range.....	2 - 11 continuous
Chlorine Tolerance.....	<0.1 ppm
Maximum Feed Flow.....	80 GPM (18 m3/hr)
Minimum Brine Flow/Permeate Flow Ratio....	5:1
Maximum SDI (15 minutes)	5.0
Maximum Turbidity.....	1 NTU
Application.....	Whey Concentration

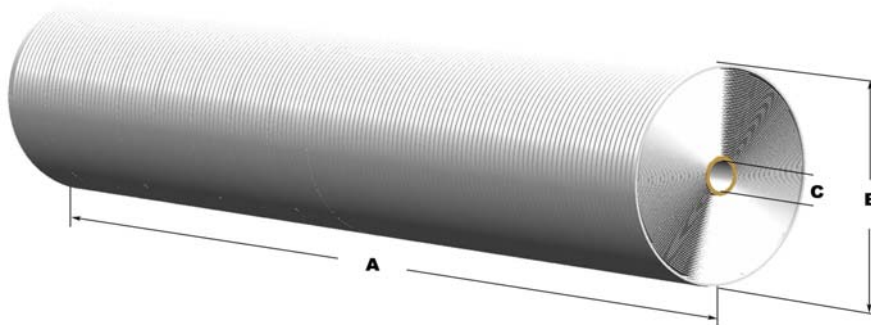

Element Weight : 45 (20)
 Length (A) : 38.00 (965) Diameter (B) : 7.90 (200) Permeate Tube (C) : 1.12 (28.6)
 Units in pounds and inches, units in paranthesis in kilograms and millimetres.
 Mechanical Configuration: Filmtec Style Core Tube
 Feed Spacer: 0.031" thick diamond spacer

* Permeate flow is clean water flux at standard conditions above. Not applicable for all feedwater conditions. Individual element's permeate flow may vary +/- 15%.



Engineered Membrane
SOLUTIONS